

L135

LED spotlights







light fitting for feeding tracks for LED light sources • 355° rotatable and 90° tiltable • housing from aluminium profile • colour option • mounting on both horizontal and vertical tracks



LED PAR16



LED PAR30



Order code

Pict.

Source

Power

Socket

kg

L135-Q0.110/16

a

LED PAR16

max. 1x10W

GU10

0,3

L135-Q0.110/16b

b

LED PAR16

max. 1x10W

GU10

0,4

L135-E2.120/30

c


LED PAR30

max. 1x20W


E27

0,5

Multiple mounting options

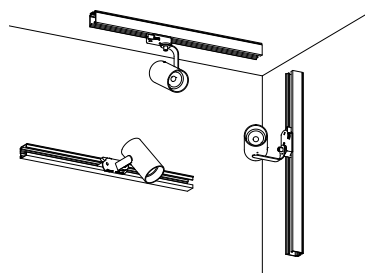

 LED retrofit
PAR16 / GU10

 LED retrofit
PAR30 / E27

W3

S3

D3

B3



230V-50Hz

PDF

Accessories



Tracks
3-Phase syst.



L135

LED spotlights

light fitting for feeding tracks for LED sources COIN 50 COB • 355° rotatable and 90° tiltable • three-phase adapter with integrated control gear • housing from aluminium profile • colour option • optional colour of COIN 50 COB cover ring black or white • light source is part of the light fitting • rated median operational life-time of luminaire 50 000h L70/B50 at Ta = 25°C • Standard Deviation Colour Matching MacAdam 2-step • mounting on both horizontal and vertical tracks




LED COIN 50 COB B




Order code	Pict.	Power	Flux	Tc	Ra	kg
L135aFII.108b/..*	a	1 x 8 W	559 lm	2700 K	≥ 80	0,9
L135aFWI.108b/..*	a	1 x 8 W	673 lm	3000 K	≥ 80	0,9
L135aFCI.108b/..*	a	1 x 8 W	706 lm	4000 K	≥ 80	0,9
L135aFII.110b/..*	a	1 x 10 W	700 lm	2700 K	≥ 80	0,9
L135aFWI.110b/..*	a	1 x 10 W	843 lm	3000 K	≥ 80	0,9
L135aFCI.110b/..*	a	1 x 10 W	885 lm	4000 K	≥ 80	0,9
L135aFII.114b/..	a	1 x 14 W	981 lm	2700 K	≥ 80	0,9
L135aFWI.114b/..	a	1 x 14 W	1180 lm	3000 K	≥ 80	0,9
L135aFCI.114b/..	a	1 x 14 W	1239 lm	4000 K	≥ 80	0,9

The shown value of luminous flux is useful luminous flux in solid angle 90°. The value depends on the beam angle of the light source.



MULTIPLE MOUNTING OPTIONS



LED COIN 50

- W3
- S3
- D3
- B3



230V-50Hz

Higher colour rendering index (CRI)

G

Example of order code assembly: [Ra ≥90](#)

[L135aGWI.114b/24B.D3](#)

Dimmable version (* not possible)

D / B

Example of order code assembly: [dimmable DALI](#)

[L135aFWD.114b/24B.D3](#)

Optional beam angle

15 / 24 / 40

Example of order code assembly: [LED source with beam angle 24°](#)

[L135aFWI.114b/24B.D3](#)

Optional colour of COIN 50 COB covering ring

B / W

Example of order code assembly: [black ring COIN 50 COB](#)

[L135aFWI.114b/24B.D3](#)



Complements



F9-050
linear spr. lens



Accessories



Tracks
3-Phase syst.



Tracks
Pulse Control



KL - 05
barn doors


L135

LED spotlights

light fitting for feeding tracks • 355° rotatable and 180° tiltable • three-phase adapter with integrated control gear and light source COIN 111 COB • construction: steel sheet, aluminium cover • colour option • optional colour of COIN 111 COB cover ring black or white • rated median operational life-time of luminaire 50 000h L70/B50 at Ta = 25°C • Standard Deviation Colour Matching MacAdam 2-step • mounting on both horizontal and vertical tracks




LED COIN 111 COB B

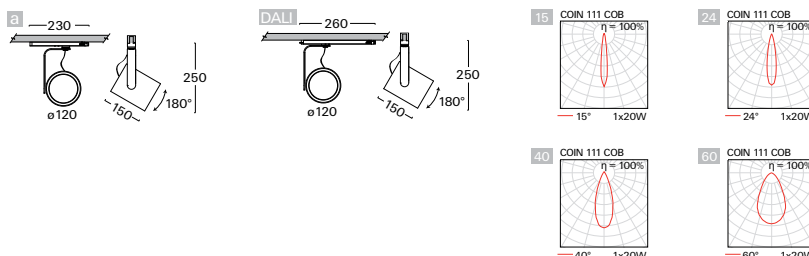


Order code	Angle	Pict.	Power	Flux	Tc	Ra	kg
L135aBII.108/..	15/24/40/60	a	1 x 8 W	748 lm	2700 K	≥ 90	1,1
L135aAWI.108/..	15/24/40/60	a	1 x 8 W	952 lm	3000 K	≥ 80	1,1
L135aACI.108/..	15/24/40/60	a	1 x 8 W	986 lm	4000 K	≥ 80	1,1
L135aBII.110/..	15/24/40/60	a	1 x 10 W	902 lm	2700 K	≥ 90	1,1
L135aAWI.110/..	15/24/40/60	a	1 x 10 W	1148 lm	3000 K	≥ 80	1,1
L135aACI.110/..	15/24/40/60	a	1 x 10 W	1189 lm	4000 K	≥ 80	1,1
L135aBII.114/..	15/24/40/60	a	1 x 14 W	1232 lm	2700 K	≥ 90	1,1
L135aAWI.114/..	15/24/40/60	a	1 x 14 W	1568 lm	3000 K	≥ 80	1,1
L135aACI.114/..	15/24/40/60	a	1 x 14 W	1624 lm	4000 K	≥ 80	1,1
L135aBII.120/..	15/24/40/60	a	1 x 20 W	1672 lm	2700 K	≥ 90	1,1
L135aAWI.120/..	15/24/40/60	a	1 x 20 W	2128 lm	3000 K	≥ 80	1,1
L135aACI.120/..	15/24/40/60	a	1 x 20 W	2204 lm	4000 K	≥ 80	1,1
L135aBII.128/..	15/24/40/60	a	1 x 28 W	2380 lm	2700 K	≥ 90	1,1
L135aAWI.128/..	15/24/40/60	a	1 x 28 W	2905 lm	3000 K	≥ 80	1,1
L135aACI.128/..	15/24/40/60	a	1 x 28 W	3045 lm	4000 K	≥ 80	1,1
L135aBII.136/..	24/40/60	a	1 x 36 W	2992 lm	2700 K	≥ 90	1,1
L135aAWI.136/..	24/40/60	a	1 x 36 W	3652 lm	3000 K	≥ 80	1,1
L135aACI.136/..	24/40/60	a	1 x 36 W	3828 lm	4000 K	≥ 80	1,1
L135aBII.142/..	24/40/60	a	1 x 42 W	3400 lm	2700 K	≥ 90	1,1
L135aAWI.142/..	24/40/60	a	1 x 42 W	4150 lm	3000 K	≥ 80	1,1
L135aACI.142/..	24/40/60	a	1 x 42 W	4350 lm	4000 K	≥ 80	1,1

The shown value of luminous flux is useful luminous flux in solid angle 90°. The value depends on the beam angle of the light source.



MULTIPLE MOUNTING OPTIONS



LED COIN 111 COB

- W3
- S3
- D3
- B3



230V-50Hz

Higher colour rendering index (CRI) 2700K only for Ra90

B

Example of order code assembly: Ra ≥90

L135aBCI.128/24B.D3

Dimmable version

D / B

Example of order code assembly: dimmable DALI

L135aACD.128/24B.D3

Optional beam angle

15 / 24 / 40 / 60

Example of order code assembly: LED source with beam angle 24°

L135aACI.128/24B.D3

Optional colour of COIN 111 COB covering ring


B / W

Example of order code assembly: black ring COIN 111 COB

L135aACI.128/24B.D3



Accessories



Tracks

Tracks

3-Phase syst.

Pulse Control




L135

LED spotlights

light fitting for feeding tracks • 355° rotatable and 180° tiltable • light source COIN 111 AC • construction: steel sheet, aluminium cover • colour option • rated median operational life-time of luminaire 35 000h L70/B50 at Ta = 25°C • Standard Deviation Colour Matching MacAdam 3-step • mounting on both horizontal and vertical tracks




LED COIN 111 AC




Order code	Angle	Pict.	Power	Flux	Tc	Ra	kg
L135-AW.112/..	24/40	a	1 x 12 W	1165 lm	3000 K	≥ 80	0,9
L135-AC.112/..	24/40	a	1 x 12 W	1200 lm	4000 K	≥ 80	0,9
L135-AW.117/..	24/40	a	1 x 17 W	1649 lm	3000 K	≥ 80	0,9
L135-AC.117/..	24/40	a	1 x 17 W	1698 lm	4000 K	≥ 80	0,9

The shown value of luminous flux is useful luminous flux in solid angle 90°. The value depends on the beam angle of the light source.



MULTIPLE MOUNTING OPTIONS



LED COIN 111 AC

- W3
- S3
- D3
- B3



230V-50Hz

Optional beam angle

24 / 40

Example of order code assembly: LED source with beam angle 24°

[L135-AW.117/24.D3](#)



Accessories



Tracks
3-Phase syst.

EXPLANATORY NOTES

for order code assembly

1	2	3	4	5	6	7	8	9	10	11			
V	299	s	LW	DN	.	124	A	/	HD	A3	.	W3	B

1	MOUNTING CATEGORY			2	PRODUCT CODE		3	CONFIGURATION OF LIGHT FITTING				
V	recessed	L	track	299	type marking of light fitting		s	control gear on cable (part of l. fitting)				
S	ceiling	Z	pendant	014	type marking of insert		c	control gear in luminaire (part of l. fitting)				
N	wall	C	insert of fitting	etc.			a	control gear in adapter (part of l. fitting)				
F	floor						r	control gear in rosette (part of l. fitting)				
							-	without control gear				
4	TYPE OF LIGHT SOURCE (SOCKET)											
Q0	LED PAR16 (GU10)			E2	LED A60, A65 (E27)		E2	LED PAR20, 30, 38 (E27)				
4a	TYPE OF LED LIGHT SOURCE			4b	CHROMATICITY OF LED SOURCE		4b	SPECTRUM OF LED SOURCE				
A	LED COIN 111 COB, COIN 111 AC Ra >80			I	warm white "interna" (2700 K)		R	spectrum for meat and sausages				
B	LED COIN 111 COB Ra >90			W	warm white (3000 K)		Y	spectrum for pastry, delicatessen and cheese				
F	LED COIN 50 COB Ra >80			B	white (3500 K)		F	spectrum for fish				
G	LED COIN 50 COB Ra >90			C	cool white (4000 K)		Z	spectrum for fruits and vegetables				
N	LED COIN 35 COB Ra >80			D	daylight white (5000 K)		A	spectrum for art (Ra>97)				
P	LED COIN 35 COB Ra >90			S	cool daylight (6500 K)		V	spectrum for clothing, fashion				
L	LED panel Ra >80			K	tunable white - commercial (2700 K-6500 K)		P	spectrum for plant growth				
M	LED panel Ra >90			T	dim to warm (dimming to warm chroma.)							
C	LED COB Ra >80											
D	LED COB Ra >90											
5	TYPE OF CONTROL GEAR						6	NUMBER AND OUTPUT OF LIGHT SOURCE				
	BASIC CONFIGURATION				EMERGENCY CONFIGURATION			NUMBER OF SOURCES, POWER OF FITTING				
I	non-dimmable constant current driver			N	emergency 1h		108	1 x 8 W				
U	non-dimmable constant voltage driver			H	emergency 3h		114	1 x 14 W				
A	dimmable analog 1-10V			F	emergency 1h with autotest		229	2 x 29 W				
D	dimmable DALI			G	emergency 3h with autotest		337	3 x 37 W				
S	dimmable DSI			Z	electronic address module		443	4 x 43 W				
C	dimmable with CORRIDOR function			P	central battery system							
T	dimmable using button 230V											
W	dimmable using push-button on luminaire											
L	phase dimmable											
X	dimmable Tunable white DALI											
B	dimmable Casambi (Bluetooth)											
7	TYPE OF REFLECTOR							TYPE OF DIFFUSER				
SS	super spot - beam angle <10°			MDG	medium - beam angle 21-34° (gold)		HD	smooth divided				
SP	spot - beam angle 10-20°			FLG	flood - beam angle 35-49° (gold)		HG	powder coated gold (G1)				
MD	medium - beam angle 21-34°			HU	smooth UGR < 19		SB	powder coated black sand (B3)				
FL	flood - beam angle 35-49°			MU	matt UGR < 19		SW	powder coated white sand (W3)				
WF	wideflood - beam angle ≥ 50°						xx	optional RAL colour				
8	TYPE OF COVER GLASS / FILTER							COLOUR OF COIN COB COVER RING				
T1	tempered glass - clear			F4	blue filter		B	black				
T3	tempered glass - opal			F5	red filter		W	white				
A1	acrylic glass - clear			F6	green filter							
A3	acrylic glass - opal			F7	yellow filter							
M1	acrylic microprisma - clear			FH	honeycomb louvre							
M3	acrylic microprisma - opal			F9	linear spread lens*							
					* for use with SP/MD reflector only							
9	COLOUR AND FINISH			10	SPECIAL VERSION							
W3	white sand interior/exterior			B	for assembly in concrete housing							
S3	silver sand interior			F	for assembly in facade insulation							
B3	black sand interior/exterior			KRP	for assembly in lamella ceilings							
D3	anthracite sand dark interior/exterior			P	for assembly in sheet metal ceilings							
xx	optional RAL colour											