



S855

LED downlights

round ceiling light fitting with control gear • control gear option • increased coverage IP54 • housing from aluminium profile • color option • optional smooth opal or microprismatic opal diffuser from PMMA • rated median operational life-time of luminaire 50 000h L70/B50 at Ta = 25°C • Standard Deviation Colour Matching MacAdam 3-step



A3



Order code	Pict.	Power	Flux	Tc	Ra	kg
S855cLWI.107/..	a	1 x 7 W	900 lm	3000 K	≥ 80	1,2
S855cLCI.107/..	a	1 x 7 W	940 lm	4000 K	≥ 80	1,2
S855cLDI.107/..	a	1 x 7 W	960 lm	5000 K	≥ 80	1,2
S855cLWI.110/..	a	1 x 10 W	1240 lm	3000 K	≥ 80	1,2
S855cLCI.110/..	a	1 x 10 W	1300 lm	4000 K	≥ 80	1,2
S855cLDI.110/..	a	1 x 10 W	1320 lm	5000 K	≥ 80	1,2
S855cLWI.114/..	a	1 x 14 W	1670 lm	3000 K	≥ 80	1,2
S855cLCI.114/..	a	1 x 14 W	1760 lm	4000 K	≥ 80	1,2
S855cLDI.114/..	a	1 x 14 W	1790 lm	5000 K	≥ 80	1,2
S855cLWI.120/..	a	1 x 20 W	2360 lm	3000 K	≥ 80	1,2
S855cLCI.120/..	a	1 x 20 W	2480 lm	4000 K	≥ 80	1,2
S855cLDI.120/..	a	1 x 20 W	2550 lm	5000 K	≥ 80	1,2



LED plate



IP54 230V-50Hz

Higher colour rendering index value - CRI

M

Example of order code assembly: [Ra ≥90](#)

[S855cMCI.114/A3.D3](#)

Dimmable version

D / T / A

Example of order code assembly: [dimmable DALI](#)

[S855cLCD.114/A3.D3](#)



Optional types of acrylic glass



A3 acrylic M3 microprisma

Example of order code assembly:
[acrylic glass - opal](#)

[S855cLCI.114/A3.D3](#)


S855

LED downlights

round ceiling light fitting with control gear • control gear option • increased coverage IP54 • housing from aluminium profile • optional colour • optional smooth opal or microprismatic opal diffuser from PMMA • inner ring in black, gold or white color or RAL on request • rated median operational life-time of luminaire 50 000h L70/B50 at Ta = 25°C • Standard Deviation Colour Matching MacAdam 3-step




SBA3



HGA3



SWA3

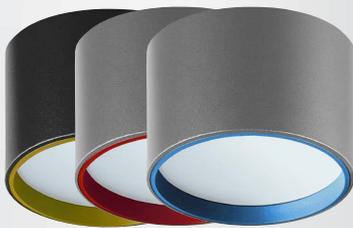

HGA3.B3

RAL A3.D3



LED plate

W3



S9

D3

B3



IP54 230V-50Hz



Order code	Pict.	Power	Flux	Tc	Ra	kg
S855cLWI.107/...	a	1 x 7 W	900 lm	3000 K	≥ 80	1,2
S855cLCI.107/...	a	1 x 7 W	940 lm	4000 K	≥ 80	1,2
S855cLDI.107/...	a	1 x 7 W	960 lm	5000 K	≥ 80	1,2
S855cLWI.110/...	a	1 x 10 W	1240 lm	3000 K	≥ 80	1,2
S855cLCI.110/...	a	1 x 10 W	1300 lm	4000 K	≥ 80	1,2
S855cLDI.110/...	a	1 x 10 W	1320 lm	5000 K	≥ 80	1,2
S855cLWI.114/...	a	1 x 14 W	1670 lm	3000 K	≥ 80	1,2
S855cLCI.114/...	a	1 x 14 W	1760 lm	4000 K	≥ 80	1,2
S855cLDI.114/...	a	1 x 14 W	1790 lm	5000 K	≥ 80	1,2
S855cLWI.120/...	a	1 x 20 W	2360 lm	3000 K	≥ 80	1,2
S855cLCI.120/...	a	1 x 20 W	2480 lm	4000 K	≥ 80	1,2
S855cLDI.120/...	a	1 x 20 W	2550 lm	5000 K	≥ 80	1,2

Optional types of rings

HG / SB / SW

Example of order code assembly: ring smooth gold

[S855cLCI.114/HGA3.D3](#)

Higher colour rendering index value - CRI

M

Example of order code assembly: Ra ≥90

[S855cMCI.114/HGA3.D3](#)

Dimmable version

D / T / A

Example of order code assembly: dimmable DALI

[S855cLCD.114/HGA3.D3](#)



Optional types of acrylic glass



A3

acrylic

M3

microprisma

Example of order code assembly:

acrylic glass - opal

[S855cLCI.114/HGA3.D3](#)

EXPLANATORY NOTES

for order code assembly

1	2	3	4	5	6	7	8	9	10	11			
V	299	s	LW	DN	.	124	A	/	HD	A3	.	W3	B

1	MOUNTING CATEGORY			2	PRODUCT CODE		3	CONFIGURATION OF LIGHT FITTING					
V	recessed	L	track	299	type marking of light fitting		s	control gear on cable (part of l. fitting)					
S	ceiling	Z	pendant	014	type marking of insert		c	control gear in luminaire (part of l. fitting)					
N	wall	C	insert of fitting	etc.			a	control gear in adapter (part of l. fitting)					
F	floor						r	control gear in rosette (part of l. fitting)					
							-	without control gear					
4	TYPE OF LIGHT SOURCE (SOCKET)												
Q0	LED PAR16 (GU10)			E2	LED A60, A65 (E27)		E2	LED PAR20, 30, 38 (E27)					
4a	TYPE OF LED LIGHT SOURCE			4b	CHROMATICITY OF LED SOURCE		4b	SPECTRUM OF LED SOURCE					
A	LED COIN 111 COB, COIN 111 AC Ra >80			I	warm white "interna" (2700 K)		R	spectrum for meat and sausages					
B	LED COIN 111 COB Ra >90			W	warm white (3000 K)		Y	spectrum for pastry, delicatessen and cheese					
F	LED COIN 50 COB Ra >80			B	white (3500 K)		F	spectrum for fish					
G	LED COIN 50 COB Ra >90			C	cool white (4000 K)		Z	spectrum for fruits and vegetables					
N	LED COIN 35 COB Ra >80			D	daylight white (5000 K)		A	spectrum for art (Ra>97)					
P	LED COIN 35 COB Ra >90			S	cool daylight (6500 K)		V	spectrum for clothing, fashion					
L	LED panel Ra >80			K	tunable white - commercial (2700 K-6500 K)		P	spectrum for plant growth					
M	LED panel Ra >90			T	dim to warm (dimming to warm chroma.)								
C	LED COB Ra >80												
D	LED COB Ra >90												
H	LED COB Ra >97												
5	TYPE OF CONTROL GEAR							6	NUMBER AND OUTPUT OF LIGHT SOURCE				
BASIC CONFIGURATION			EMERGENCY CONFIGURATION			NUMBER OF SOURCES, POWER OF FITTING							
I	non-dimmable constant current driver			N	emergency 1h		108	1 x 8 W					
U	non-dimmable constant voltage driver			H	emergency 3h		114	1 x 14 W					
A	dimmable analog 1-10V			F	emergency 1h with autotest		229	2 x 29 W					
D	dimmable DALI			G	emergency 3h with autotest		337	3 x 37 W					
S	dimmable DSI			Z	electronic address module		443	4 x 43 W					
C	dimmable with CORRIDOR function			P	central battery system								
T	dimmable using button 230V												
W	dimmable using push-button on luminaire												
L	phase dimmable												
X	dimmable Tunable white DALI												
B	dimmable Casambi (Bluetooth)												
7	TYPE OF REFLECTOR							TYPE OF DIFFUSER					
SP	spot - beam angle 10-20°			MDG	medium - beam angle 21-34° (gold)		HD	smooth divided					
MD	medium - beam angle 21-34°			FLG	flood - beam angle 35-49° (gold)		HG	powder coated gold (G1)					
FL	flood - beam angle 35-49°			HU	smooth UGR < 19		SB	powder coated black sand (B3)					
WF	wideflood - beam angle ≥ 50°			MU	matt UGR < 19		SW	powder coated white sand (W3)					
							xx	optional RAL colour					
8	TYPE OF COVER GLASS / FILTER							COLOUR OF COIN COB COVER RING					
T1	tempered glass - clear			F4	blue filter		B	black					
T3	tempered glass - opal			F5	red filter		W	white					
A1	acrylic glass - clear			F6	green filter								
A3	acrylic glass - opal			F8	orange filter								
M1	acrylic micropisma - clear			FH	honeycomb louvre								
M3	acrylic micropisma - opal			F9	linear spread lens*								
					* for use with SP/MD reflector only								
9	COLOUR AND FINISH			10	SPECIAL VERSION								
W3	white sand interior/exterior			B	for assembly in concrete housing								
S3	silver sand interior			F	for assembly in facade insulation								
B3	black sand interior/exterior			KRP	for assembly in lamella ceilings								
D3	anthracite sand dark interior/exterior			P	for assembly in sheet metal ceilings								
S9	silver sand interior/exterior												
xx	optional RAL colour												